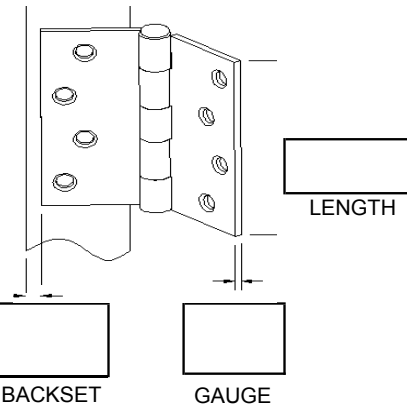


Hinge Placement For 7-0 Doors

		Prefit and Premachined Door Schedule		ORDER NUMBER		PAGE NUMBER		DOOR TYPE / #		SPECIES			
FRAME OPENING SIZE X X Width Height Thickness				JAMB TYPE: ☐ Flat (square) or (colonial) ☐ Single Rabbeted ☐ Double Rabbeted ☐ Kerf				BEVEL STILES ☐ NONE ☐ HINGE ☐ BOTH ☐ LOCK Removable stop is inside unless noted		FIRE RATING ☐ 20 NP SINGLE ☐ 20 NP PAIR ☐ 20 PP ☐ 45 PP ☐ 60 PP ☐ 90 PP SINGLE ☐ 90 PP PAIR			
PREFIT DOOR SIZE X X													
HINGES RADIUS ☐ SQUARE ☐ MANUFACTURER NO./TEMPLATE				LOCK MANUFACTURER NO. TEMPLATE NO.				EXIT DEVICE TOP OF DOOR TO CENTER OF: MFG NO & TRIM LOCK FRONT CYLINDER TEMPLATE ☐ DEVICE BACKSET					
				OTHER HARDWARES/NOTES				GLASS THICKNESS (if applicable) ☐ 1/8" ☐ 1/4" ☐ 3/16" ☐ 1/2" ☐ 5/16" ☐ 3/8" ☐ OTHER OPEN TYPE:					
								Ball Catches Template # Location					
				LOCK TYPE: (check one) Cylindrical: ☐ Mortise: ☐ Other: ☐				FLUSH BOLT TEMPLATE					
TOP OF DOOR TO TOP OF HINGE: 1st Hinge 2nd Hinge 3rd Hinge 4th Hinge				TOP OF DOOR TO CENTERLINE OF LOCK: BACKSET:				STRIKE -- SIZE: TYPE: TEMPLATE:					
LATCH PLATE ☐ See Template ☐ 1-1/8" x 2-1/4" ☐ 1" x 2-1/4" ☐ 1-1/8" x 7/8" ☐ 1" Hole ☐ 7/8" Hole													
STRIKES ☐ 1-1/8" x 2-3/4" ☐ 1-1/8" x 2-1/2" ☐ 4-7/8" ASA ☐ 2 -1/4"													
						TOTAL DOORS							
								