



blink 1" Custom
BLINDS + GLASS

An **ADL** Brand



CUSTOM
SIZES

8.625-80" wide⁺
13-80" tall
1" thick

⁺Widths below 10" will have an asymmetrical design.



GLASS
OPTIONS

Tempered glass-up to 17 sq ft
(above 12 sq ft, has dual operator)

Annealed glass-up to 15 sq ft
(single operator)

Low-E options: Single: 270, 272, 340, 366
Dual: 189/270, 189/272, 189/366
Glass Coating: NEAT: 270, 366, 189/270, 189/366



DIFFERENT
COLORS



WHITE



TAN



ESPRESSO



SLATE
GRAY



SILVER
MOON



SAND



MINIMUM
QUANTITY

Low-E: 1
CL/CL: 1




TURNAROUND
TIME

Annealed Shipping Lead Times:
US: 7 business days + transit | Canada: 9 business days + transit
Tempered Shipping Lead Times:
US: 12 business days + transit | Canada: 14 business days + transit

SIZES	
IG thickness	1"
Height range	13" to 80"
Width range	8.625" to 80"
Size increments	1/16" (height & width)
Annealed glass	Max 15 sq. ft. (no more than 36" in one direction)
Tempered glass	Max 17 sq. ft. (no more than 36" in one direction)
MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (std.)	1/8" annealed glass or 1/8" tempered safety glass
Glass (Low-E)	1/8" annealed glass or 1/8" tempered safety glass Single Low-e: 2nd surface soft coat (270, 272, 340, 366) Dual Low-e: 4th surface hard coat Low-E (I89)
Glass (NEAT)	NEAT: 1st surface
Blind slat	12.5mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture and chemical management)
Decorative cover caps	UV stabilized, heat tolerant polymer
CODE COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	(CAD available for simulations)
OPERATION	
Single operator	Annealed glass: Up to 15 sq. ft. Tempered glass: Up to 12 sq. ft.
Dual operator	Tempered glass: 12 to 17 sq. ft.
Capillary tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 30" in height)
COLORS	
Blind slat	White, Tan, Sand, Espresso, Silver Moon, Slate Gray
Operator	White, Tan, Sand, Espresso, Silver Moon, Slate Gray
Operator track	White, Tan, Sand, Espresso, Silver Moon, Slate Gray
Decorative cover caps	White, Tan, Sand, Espresso, Silver Moon, Slate Gray
Sealant	Gray
MAINTENANCE	
Clean glass with soap and water or quality window cleaner, as needed	
WARRANTY	
10-year full warranty	

*Please see size charts for size capabilities. Contact your sales representative for size charts.

TECHNICAL DRAWING

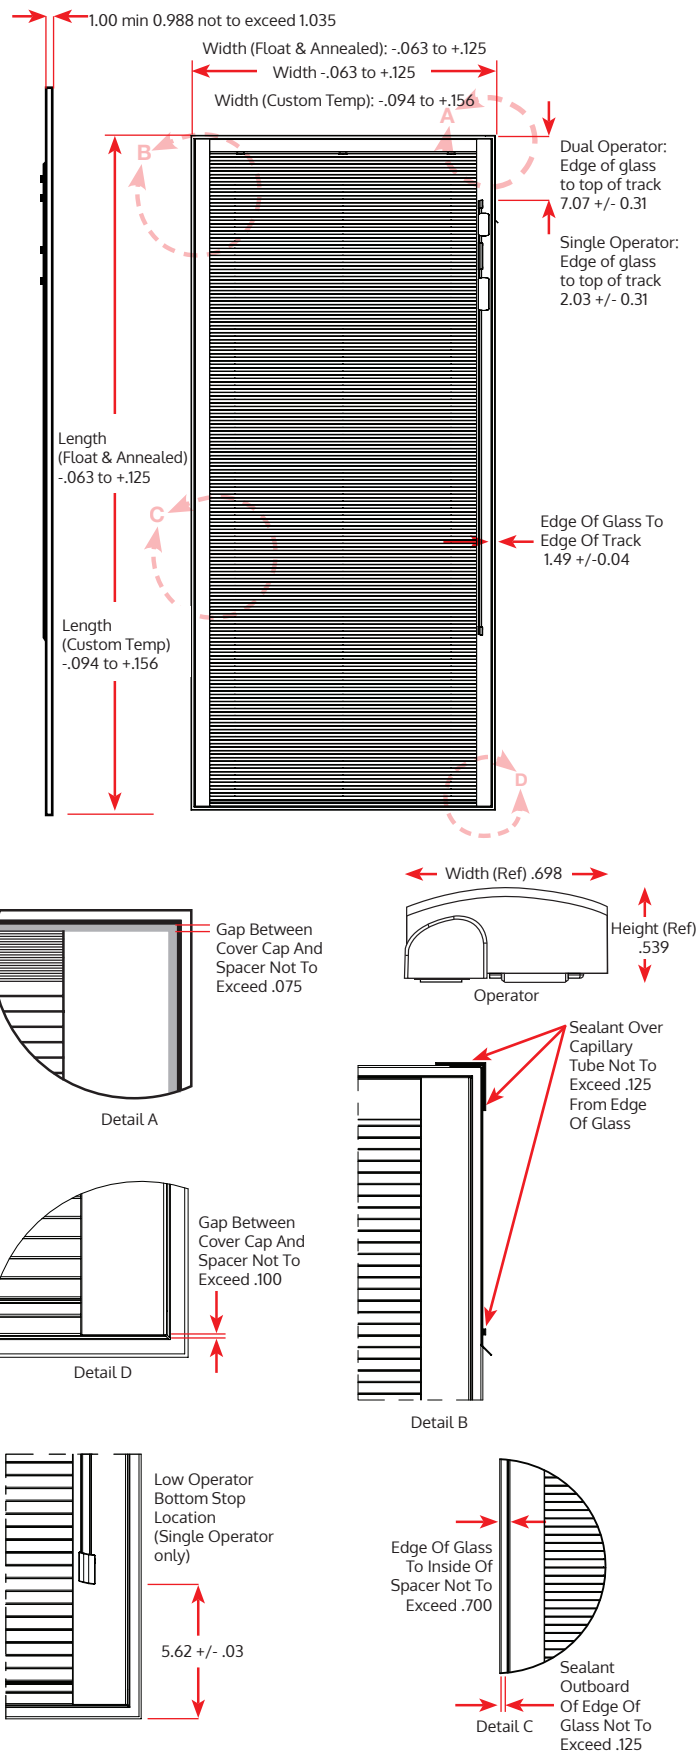

WARNING!
Cancer and Reproductive Harm -
www.P65Warnings.ca.gov