



Product Features

- For use in single/double-hung windows and light commercial applications
- Blinds remain down with single-function tilt operator for optimum light and privacy control
- Tilt Operator located in top right-hand corner
- Easy to maintain – clean with soap and water, or high quality window cleaner
- 10-year full warranty
- Blinds certified safe for children and pets with no exposed cords



Sizes

| | |
|-----------------|---|
| IG Thickness | 7/8" |
| Height Range | 12" to 68" |
| Width Range | 8" to 54" |
| Size Increments | 1/16" (height & width) |
| Max IG Size | Annealed glass: 9 sq. ft. Tempered glass: 9 sq. ft. (no more than 36" in one direction) |

Please refer to chart located on the right for custom size options.


Low-E Options

| | |
|--------|--|
| Single | 270, 272, 340 and 366 |
| Dual | 189/270, 189/272, 189/340, and 189/366 |

Glass Coating Options

| | |
|------|--------------------------------|
| NEAT | 270, 366, 189/270, and 189/366 |
|------|--------------------------------|

Custom Size Options

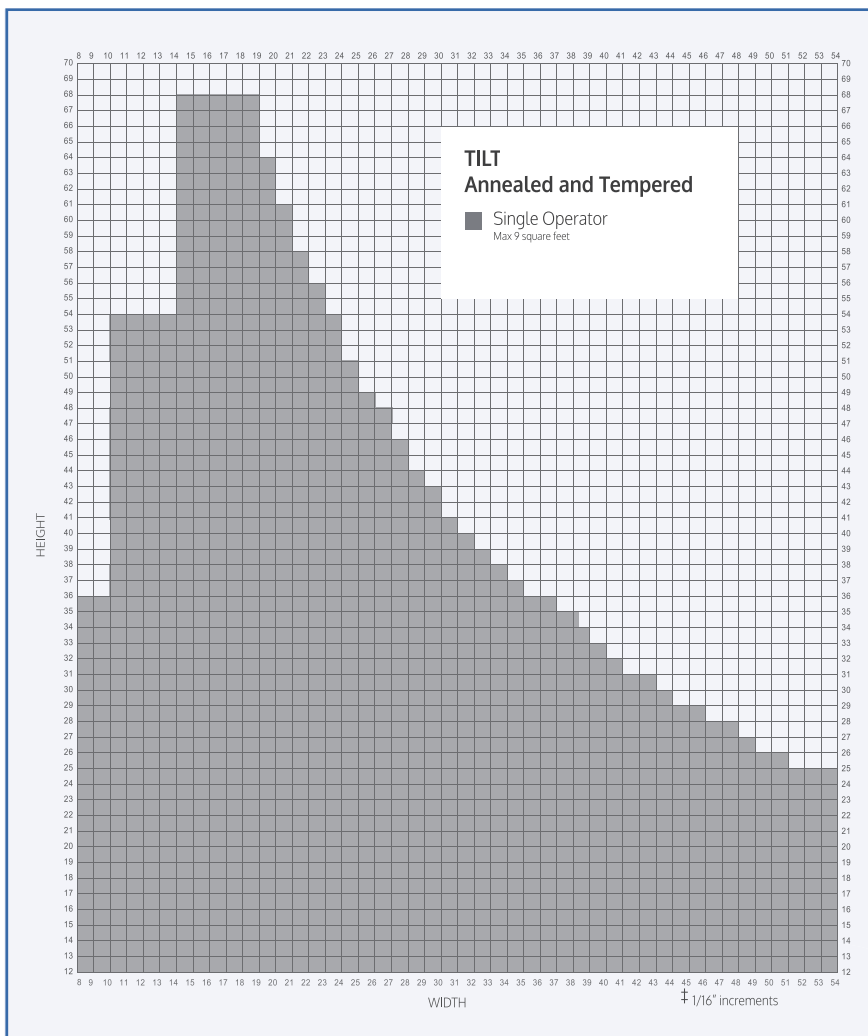

Finish Options

Blind slats, operators, operator track and decorative cover caps are available in six different colors



White



Tan



Espresso



Slate
Gray




Silver
Moon



Sand

Technical Drawings & Specifications

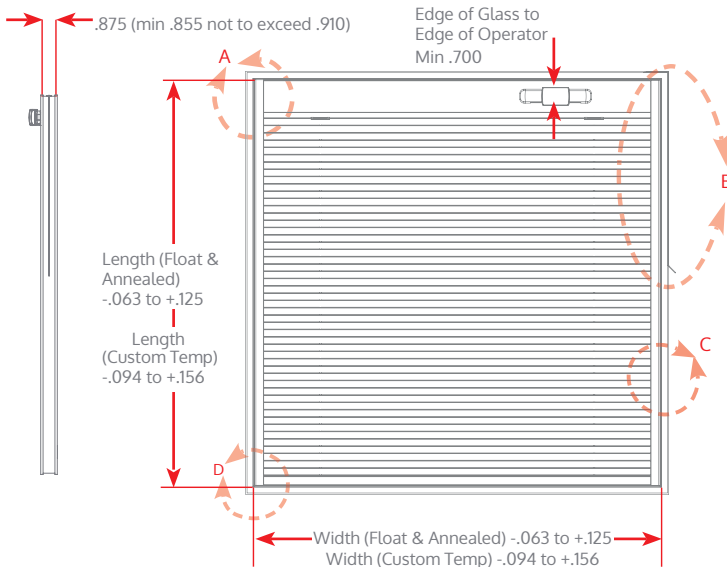


Materials

| | |
|---------------------------|---|
| Spacer | Intercept®, tin plated steel |
| Glass (Standard or Low-E) | 1/8" annealed or 1/8" tempered safety glass |
| Single Low-E | 2nd surface soft coat (270, 272, 340, 366) |
| Dual Low-E | 4th surface hard coat Low-E (I89) |
| Glass Coating | NEAT: 1st surface (270, 366, I89/270, I89/366) |
| Blind Slat | 11.5mm wide aluminum UV stabilized coating |
| Sealant | Dual seal equivalent |
| Desiccant | Desiccant matrix (moisture & chemical management) |
| Decorative Cover Caps | UV stabilized, heat tolerant polymer |

Code of Compliance

| | |
|---------------|--|
| IGCC (seal) | ASTM E2190 seal certification |
| ANSI (glass) | ANSI Z97.1 safety glazing (Applies to tempered glass only) |
| ASTM (glass) | ASTM C1036-16 (annealed) & C1048-12 (tempered) |
| ANSI (safety) | ANSI / WCMA A100.1-2018 |
| ENERGY STAR® | Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed |
| NFRC | CAD available for simulations |

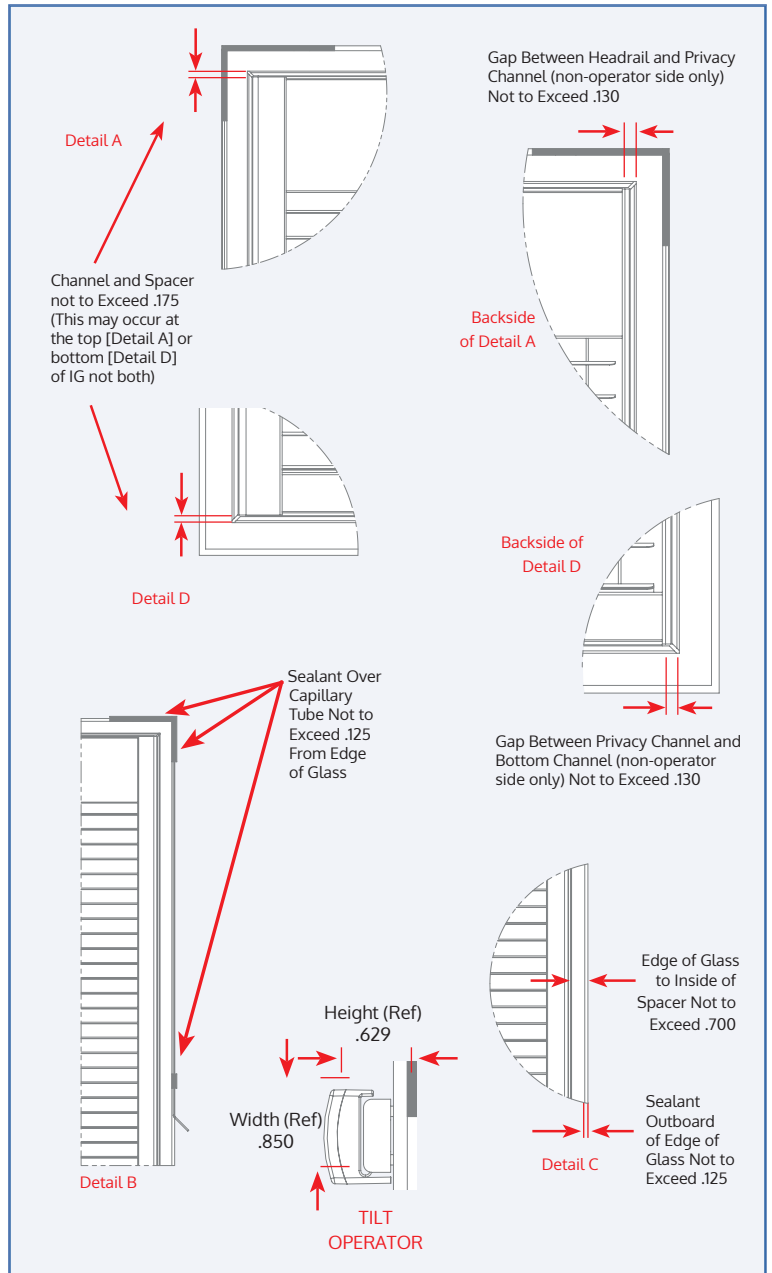

Operation

| | |
|-------------------|--|
| Blind Function | Tilt |
| Tilt Operator | Clear Overmold/Two Shot |
| Single Operator | Annealed glass: Up to 9 sq. ft. Tempered glass: Up to 9 sq. ft. |
| Capillary Tube | Do not block, crush or cut |
| Operator Position | Top Right |

U.S. Patent Pending